


Order no.: 070633

## FlexxGuard telescopic railing

Length max. [mm]

**1200** 1800 2500

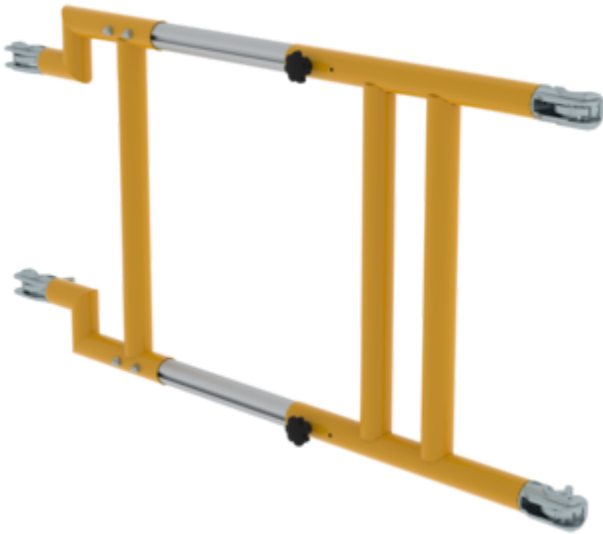

### Specification

Retracted length 900 mm	Extended length 1.2 m	Adjustment range 300 mm	Width 630 mm	Railing height 1.1 m
Design type Mobile	Railing Telescopic	Material Aluminium coated	Colour RAL 1021	Weight 4.5 kg
Business division MUNK Günzburger Steigtechnik	Order no. 070633	Price € 850.00		

### Facts

- Flexible length adjustment
- Automatically closing scaffolding claw for a secure connection
- Welded round tube frame for maximum stability
- Railing with integrated knee rail

## Scope of supply

- Installation material: 1 x
- Assembly instructions: 1 x

## Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

## Added value

---

With the mobile FlexxGuard modular safety railing system, you can easily secure hazardous areas on construction sites or in industrial plants and thus protect workers and visitors. The guardrails can be quickly and easily installed and secured on grating floors. Thanks to the flexible design, the FlexxGuard safety railing can be optimally adapted to requirements and thus guarantees the best possible protection.

A complete safety guardrail consists of at least:

- Telescopic guardrail: 1x or more
- Railing posts: 2x or more
- Safety gate: 1x or more (if access option required)

### Advantages

- High level of safety
- Mobile application
- Quick and easy to assemble without tools
- Adaptable to various requirements
- Durable and low-maintenance

### Assembly Variations

The FlexxGuard safety railing can be assembled in numerous variations. The components can be flexibly combined without tools, allowing hazards to be mitigated quickly and easily. Eye-catching design, thoughtful components, and high-quality materials ensure optimal protection.



## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

