


Order no.: 012955

FlexxTower double railing

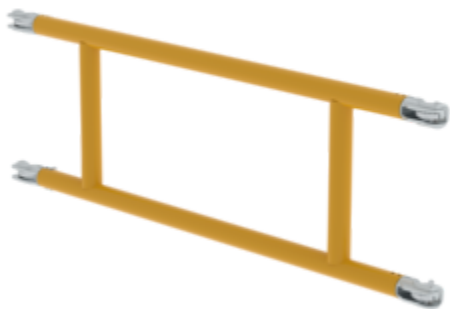

Specification

| | | | | |
|-------------------------------------------------------|------------------------------------------------------|---------------------|------------------------------------|------------------|
| Length 1.34 m | Width 430 mm | Height 95 mm | Suitable for Mobile scaffolding | Weight 3.7 kg |
| Transport dimensions 1340 x 430 x 95 mm, 3.7 kg | Business division MUNK Günzburger Steigtechnik | Order no. 012955 | Price € 164.00 | |

Facts

- Double railing for added safety and stability
- Easy to install and adapt to different heights and requirements
- Suitable for FlexxTower and FlexxTower SG
- Powder-coated in RAL 1021

Scope of supply

- Garde-corps: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548



Nachhaltigkeit

EcoVadis
sustainable supply management

CSR-Rating in Silber 2022

