


Order no.: 167211

## Mobile scaffolding SG 1.35 × 2.45 m with inclined ascents & outrigger

Platform height [mm]

4470 6430 8390 10350

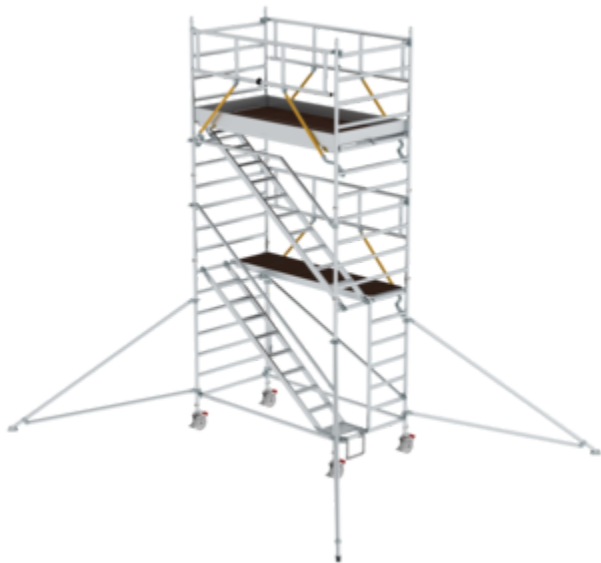

### Specification

Working height <b>6.47 m</b>	Scaffolding height <b>5.74 m</b>	Platform height <b>4.47 m</b>	Platform width <b>1.35 m</b>	Platform length <b>2.45 m</b>
Load capacity <b>2 kN/m<sup>2</sup></b>	Weight <b>242 kg</b>	Transport dimensions <b>3100 x 1400 x 800 mm, 236 kg</b>	Indoor use, central installation <b>possible &amp; allowed</b>	Indoor use, lateral installation <b>possible &amp; allowed</b>
Outdoor use, central installation <b>possible &amp; allowed</b>	Outdoor use, lateral installation <b>possible &amp; allowed</b>	Ballasting of scaffolding, indoor, central installation <b>0 kg</b>	Ballasting of scaffolding, indoor, lateral installation <b>0 kg</b>	Ballasting of scaffolding, outdoor, central installation <b>0 kg</b>
Ballasting of scaffolding, outdoor, lateral installation <b>0 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Order no. <b>167211</b>	Price <b>€ 8,285.00</b>	

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Secured all around thanks to leading railing, can be assembled and dismantled from level to level

- inclined steps from platform to platform with 100 mm deep, ribbed aluminium steps and handrail for safe ascent and descent as if on stairs
- All scaffolding parts are also available individually as spare or extension parts
- Stable and flexible thanks to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Access through opening in the entry frame
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles
- Large-format work area in width of 1.35 m
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools from platform to platform thanks to push-fit connectors and quick-release fasteners
- Easy to handle thanks to individual lightweight parts
- Different platform lengths available (1.80 / 2.45 / 3.0 m)
- Working heights up to 12.35 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m<sup>2</sup>

## Scope of supply


- Entry frame: 1 x
- Push-fit frame, 1.35 m.: 3 x
- Safety railing for mobile scaffolding: 3 x
- Platform with longitudinal flap: 1 x
- Platform without flap: 2 x
- Toe board front side: 2 x
- Toe board long side: 2 x
- Diagonal brace: 1 x
- Horizontal strut: 2 x
- Triangular outrigger: 4 x
- Swivel castor with spindle: 4 x
- Top handrail for mobile scaffolding with inclined ascent: 1 x
- Handrail for mobile scaffolding with inclined ascent: 1 x
- Inclined ascent below: 1 x
- Inclined ascent: 1 x
- Step-on bracket: 1 x
- Instructions for assembly and use EN 1004-2 - de: 1 x
- Push-fit frame, 1.35 m.: 2 x

## Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



### Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



### Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability




### Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs



### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



This product may qualify for funding under the BG BAU Occupational Safety Subsidy! Funding is subject to conditions; the latest information can be found on the BG BAU website.

Our Safety Railing (SR) significantly reduces fall risks as an integrated edge protection system during assembly, modification, disassembly, and use of work and protective scaffolding. With this technical protection, you meet the highest safety standards while benefiting from an attractive subsidy of up to 50% of the purchase costs (maximum €100 per measure).

- ✓ For new mobile scaffolding: Safety railings are eligible for funding as part of a complete working platform (including safety railings and frame parts).
- ✓ For existing scaffolding: Retrofitting with compatible safety railings is possible.

All BG BAU members can benefit from this funding. The aim is to prevent workplace accidents, especially on construction sites, and to improve ergonomics. Detailed information from BG BAU is available at:

[www.bgbau.de/service/angebote/arbeitsschutzpraemien](http://www.bgbau.de/service/angebote/arbeitsschutzpraemien)

A quick guide to the funding programme and an overview of our eligible products can be found on our website under [Know-how](#).

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

