


Order no.: 930102

Aluminium profile 40x40 mm

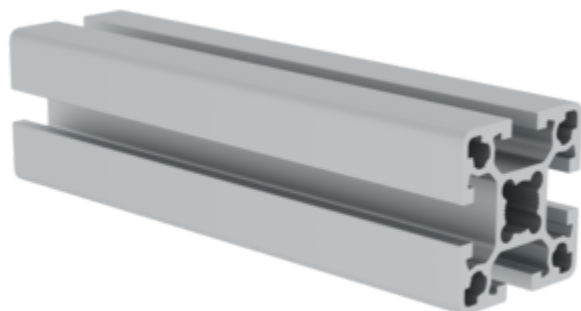

Surface finish

Anodised aluminium

Natural aluminium

Specification

Profile type Construction profile	Length max. 6 m	Material Aluminium	Profile dimension X 40 mm	Profile dimension Y 40 mm
Weight per metre 1560 g/m	Groove size 8 mm	No. of grooves 4	Ix Area moment of inertia 96331	Iy Area moment of inertia 96331
Cross-sectional area FL 573.32 mm²	Surface texture Anodised aluminium	Anodising Bright E6/EV1	End design Sawn	Core hole diameter M12
Order no. 930102				

Facts

- Construction profile made from aluminium
- Screw channel profile with T-slot
- For sturdy, versatile constructions
- Simple installation
- Versatile use
- Added visual and functional benefits

Description


The 40x40 mm aluminium profile is the ideal sturdy construction profile for your projects. The profile is made from high-quality aluminium and has screw channels for simple installation. The profile is available in various lengths up to 6000 mm and is versatile in its use. The T-slot profile is available in anodised aluminium or natural aluminium versions.

- Bright anodised
- In different lengths up to 6000 mm

Scope of supply

- Aluminium profiles, sawn to the required length (max. 6 m): 1 x

More product pictures



Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548

