


Order no.: 930103

## Aluminium profile 40x80 mm

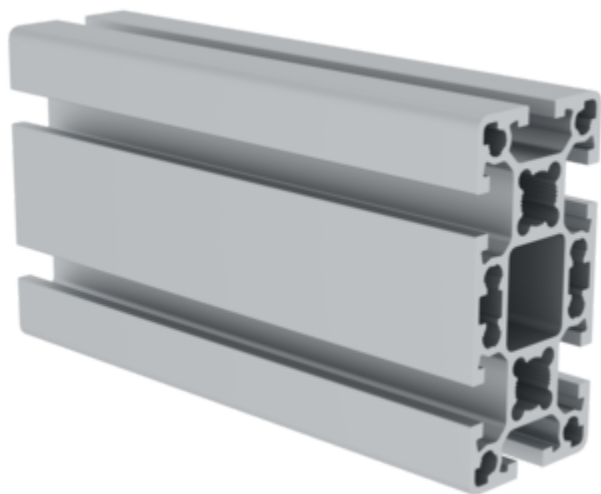

Surface finish

Anodised aluminium

Natural aluminium

### Specification

Profile type <b>Construction profile</b>	Length max. <b>6 m</b>	Material <b>Aluminium</b>	Profile dimension X <b>40 mm</b>	Profile dimension Y <b>80 mm</b>
Weight per metre <b>2840 g/m</b>	Groove size <b>8 mm</b>	No. of grooves <b>6</b>	Ix Area moment of inertia <b>183900 cm4</b>	Iy Area moment of inertia <b>653453 cm4</b>
Cross-sectional area FL <b>1053.59 mm<sup>2</sup></b>	Surface texture <b>Anodised aluminium</b>	Anodising <b>Bright E6/EV2</b>	End design <b>Sawn</b>	Core hole diameter <b>M12</b>
Order no. <b>930103</b>				

### Facts

- Construction profile made from aluminium
- Screw channel profile with T-slot
- For sturdy, versatile constructions
- Simple installation
- Versatile use
- Added visual and functional benefits

### Description

The 40x80 mm aluminium profile is an extremely versatile profile. It is a construction profile made from high-quality aluminium and has a screw channel with a T-slot. The profile is designed for sturdy, versatile constructions and is easy to install. Thanks to its slim design and variable length of up to 6000 mm, the profile is extremely versatile in its use. The surface of the

- Bright anodised
- In different lengths up to 6000 mm


profile is made from either anodised or natural aluminium and is thus extremely eye-catching as well as offering optimum functionality.

### Scope of supply

- Aluminium profiles, sawn to the required length (max. 6 m): 1 x

### More product pictures

---



## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548

