


Order no.: 930206

Corner bracket with mounting material

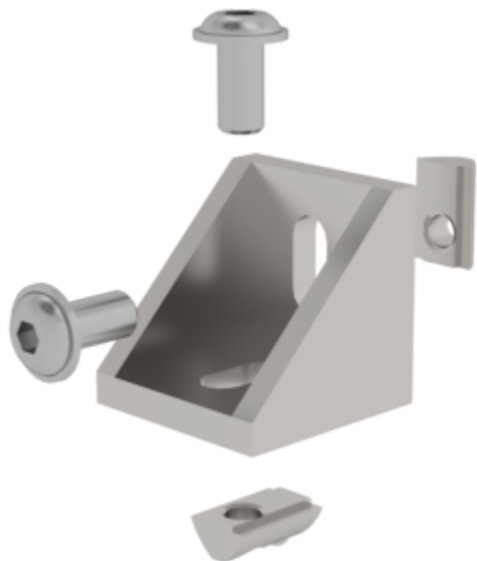

Specification

Connection type Angle connection	Material Die-cast	Groove size 8 mm	Dimension A 40 mm	Dimension B 40 mm
Dimension C 40 mm	Dimension D 5 mm	Business division MUNK Profiltechnik	Order no. 930206	

Facts

- Profile angle for profile 40
- For joining profiles to each other
- Particularly suitable for retrofitting profiles
- Incl. mounting material

Description

Ready for immediate use – corner bracket complete with fastening parts! The MUNK corner bracket with mounting material connects 40 mm profiles securely at right angles and comes with a complete fastening set.

Complete solution for 90° connections

The 40 × 40 mm die-cast corner bracket is perfect for MUNK aluminium profiles with 8 mm T-slots. Weighing 59 g and with a wall thickness of 5 mm, it ensures permanent angle stability with high clamping forces – ideal for load-bearing frame connections.

Everything included – ready for immediate installation

No need to purchase small parts separately – insert the profiles, tighten the screws, and you're done.

Can be retrofitted

Thanks to its design, the corner bracket can also be retrofitted into existing structures without dismantling entire assemblies. Perfect for extensions or reinforcements.

Robust connection with a clean look

The die-cast body absorbs high clamping forces, while the internal screws ensure smooth outer edges. Ideal for visible frames on machines or enclosures.

Typical areas of application

- Machine frames: reinforcement of 40 mm profiles without welding
- Protective & test enclosures: quick assembly of stable 90° frames
- Assembly tables: Retrofitting of struts or shelves
- Transport racks: Torsion-resistant corner connections for tugger train trolleys

Discover the MUNK corner bracket with mounting material – the complete solution for professional profile connections that hold today and can be expanded tomorrow.


Scope of supply

- Corner bracket: 1 x
- Slot nut: 2 x
- Pan head screw: 2 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

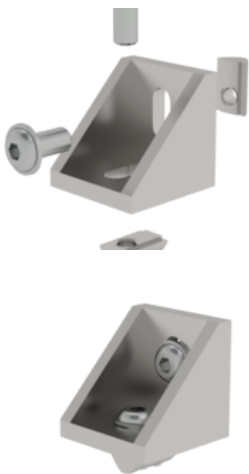

Corporate certifications

Standards for quality and sustainability

