

Order no.: 031216

## 2-section multi-purpose ladder with rungs, with nivello® stabiliser.



Number of rungs

2x8

2x10

2x12

2x14

### Specification

Working height <b>5.3 m</b>	Step design <b>Rungs</b>	Number of steps/rungs <b>2x 8 rungs</b>	Step/Rung height <b>30 mm</b>	Step depth <b>30 mm</b>
Step/Rung distance <b>280 mm</b>	Ladder length as double-sided ladder <b>2.49 m</b>	Base spread as double ladder <b>1.69 m</b>	Inclination <b>70 °</b>	Extended length <b>4.18 m</b>
Length of ladder sections <b>2.49 m</b>	Outer width <b>490 mm</b>	Stabiliser width <b>930 mm</b>	Depth of side-rails <b>73 mm</b>	Width of side-rails <b>25 mm</b>
Max. load capacity <b>150 kg</b>	Weight <b>12 kg</b>	Transport dimensions <b>2480 x 495 x 149 mm, 12 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Order no. <b>031216</b>
Price <b>€ 378.00</b>				

### Facts

- Multi-purpose rung ladder made from aluminium
- Stable rectangular tube side-rails

- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Can be used as a step ladder, straight ladder and push-up extension ladder
- Simple height adjustment thanks to insertion hook with lift-off protection
- Corrosion-resistant guide fixtures
- nivello® ladder shoes and nivello® stabiliser (enclosed separately)
- Spreader lock with two high-strength polyester straps
- Rung distance: 280 mm
- Ladder width: 490 mm (without stabiliser)
- Maximum load: 150 kg

### Scope of supply

- Ladder: 1 x
- Stabiliser (enclosed separately): 1 x
- Instructions for use and operation: 1 x

### Information on sustainability criteria


---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany

- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

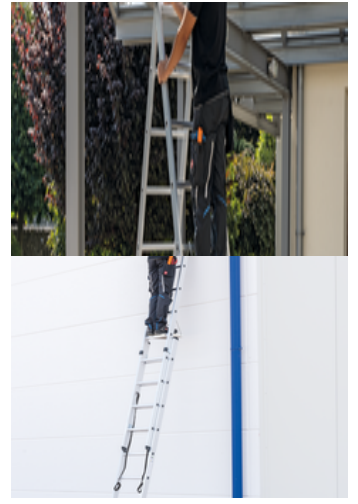

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Flexibility

- Universal and versatile use
- Compact size for transport and storage
- Upper ladder can also be used individually (up to 3.0 m)



The movable ladder shoe sets new standards in stability

[Learn more](#)



### Easy handling

- Insertion hooks with lift-off protection or automatically locking steel hinges
- Optimised guidance, thanks to guide fixtures with high-strength plastic coating

### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



### **nivello® stabiliser**

Extra safe, standards-compliant ascent for straight ladders over 3.0 m

- Extra wide stabiliser for even greater stability
- nivello® ladder shoes with patented 2-axis inclination technology, integrated work angle check and exchangeable foot plates
- Individually available as spare part




### **roll-bar retrofit kit**

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down




### **Note: Working heights**

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)




## Certificates

---



18KFP0038-02 -  
Test Certificate  
"Bauart geprüft"

Valid in



DIN EN 131-  
3:2007  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK  
EK5/AK1 17-  
03:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

