



Order no.: 031310

## Multi-function ladder 4-section with nivello® stabiliser



Number of rungs

**2x2 + 2x3**

2x3 + 2x4

4x3

4x4

### Specification

Working height <b>4 m</b>	Step design <b>Rungs</b>	Number of steps/rungs <b>2x2 + 2x3 rungs</b>	Step/Rung height <b>30 mm</b>	Step depth <b>30 mm</b>
Step/Rung distance <b>280 mm</b>	Ladder length as straight ladder <b>2.85 m</b>	Ladder length as double-sided ladder <b>1.49 m</b>	Base spread as double ladder <b>990 mm</b>	Inclination <b>70 °</b>
Height as working platform <b>630 mm</b>	Length as working platform <b>1.4 m</b>	Base spread as working platform <b>2.17 m</b>	Outer width <b>350 mm</b>	Stabiliser width <b>930 mm</b>
Depth of side-rails <b>58 mm</b>	Width of side-rails <b>25 mm</b>	Max. load capacity <b>150 kg</b>	Weight <b>12.5 kg</b>	Transport dimensions <b>933 x 360 x 273 mm, 12.5 kg</b>
Business division <b>MUNK Günzburger Steigtechnik</b>	Order no. <b>031310</b>	Price <b>€ 379.00</b>		

### Facts

- Aluminium multi-function rung ladder
- Stable rectangular tube side-rails

- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Can be used as step and straight ladder or optionally as working platform (see accessories)
- Optimum operational safety due to six automatically locking steel hinges
- nivello® stabilisers for extra safe stance and ascent (double-sided, enclosed separately)
- Rung distance: 280 mm
- Ladder width: 350 mm
- Maximum load: 150 kg
- Note: In accordance with TRBS 2121 Part 2, a suitable accessory is required for working on this ladder
- Note: According to DIN EN 131-4, a platform must also be ordered when using as a work platform (e.g. wooden surface)

### Scope of supply

- Ladder: 1 x
- Stabiliser (enclosed separately): 2 x
- Instructions for use and operation: 1 x


### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification

- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

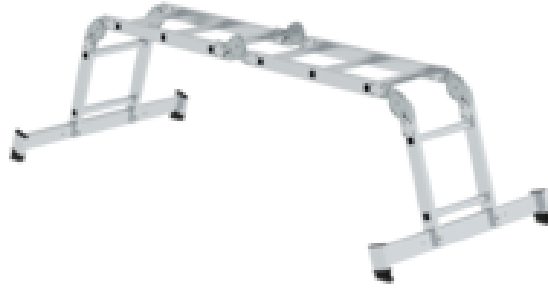

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Flexibility

- Universal and versatile use
- Compact size for transport and storage
- Upper ladder can also be used individually (up to 3.0 m)



The movable ladder shoe sets new standards in stability

### [Learn more](#)



### Easy handling

- Insertion hooks with lift-off protection or automatically locking steel hinges
- Optimised guidance, thanks to guide fixtures with high-strength plastic coating

### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



### **nivello® stabiliser**

Extra safe, standards-compliant ascent for straight ladders over 3.0 m

- Extra wide stabiliser for even greater stability
- nivello® ladder shoes with patented 2-axis inclination technology, integrated work angle check and exchangeable foot plates
- Individually available as spare part




### **roll-bar retrofit kit**

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down



### **Note: Working heights**

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



## Certificates

---



17KFP2038-02 -  
Test Certificate  
"Bauart geprüft"

Valid in



DIN EN 131-  
3:2007  
DIN EN 131-  
4:2007  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK  
EK5/AK1 17-  
03:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

