


Order no.: 077558

## Wall anchor adjustable single-rail ladder

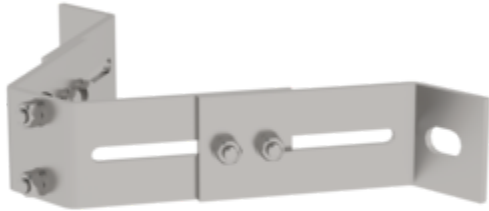

Material

Stainless steel

Galvanised steel

### Specification

Wall distance min. 115 mm	Wall distance max. 173 mm	Adjustment range 58 mm	Weight 1.5 kg	Transport dimensions 275 x 60 x 122 mm, 1.5 kg
Business division MUNK Günzburger Steigtechnik	Order no. 077558	Price € 144.00		

### Facts

- Adjustable 115–173 mm
- Hole distance of 219 – 304 mm
- Hole diameter: 16 mm
- Larger adjustment ranges on request

#### Scope of supply

- Wall anchor: 1 x
- Assembly instructions: 1 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

---

## Added value

---

### Rational modular principle

- Single-rail ladders with fall protection rail in various lengths offer the right solution for every project
- Each individual component in the modular kit system meets the same quality and efficiency requirements



### Highest quality

- High-strength welded connection of fall protection rail and rungs
- Lateral side-slip protection on rungs for additional safety



### Various material versions

- Single-rail ladders are available in steel, stainless steel or aluminium depending on the application
- Wall anchors and accessories are also available in several materials



### Variant with folding rungs

- Ideal for use wherever the ladder is to be integrated as unobtrusively as possible
- The mechanism for folding in and out can be operated from above or below using a plug-on lever
- If the operating lever is removed, the ladder is also secured against unauthorised use
- Outer width with rungs folded out: 468 mm
- Outer width with rungs folded in: 160 mm
- Price on request



## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

