



Order no.: 052705

## Folding platform ladder with narrow undercarriage



Number of steps

5

6

7

8

10

12

14

### Specification

Working height 3.15 m	Step design Stufen	Number of steps/rungs 5 steps	Platform included as step Ja	Platform height 1.15 m
Platform length 650 mm	Platform width 600 mm	Step depth 80 mm	Step/Rung distance 235 mm	Height 2.19 m
Total length folded 2.75 m	Base spread 1.4 m	Inclination 70 °	Outer width 650 mm	Stabiliser width 850 mm
Depth of side-rails 73 mm	Depth of side-rails, support 58 mm	Max. load capacity 150 kg	Design type Einseitig begehbar   Freistehend   Mit Fahrbalken	Ballast weight 30 kg
Weight incl. ballast weight 67 kg	Transport dimensions (plus packaging) 2780 x 760 x 220 mm, 29 kg	Transport dimensions (plus packaging) 2 860 x 220 x 262 mm, 37.5 kg	Business division MUNK Günzburger Steigtechnik	Order no. 052705

### Facts

- Platform ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm

- Spacious platform with grooves for secure footing (650 x 600 mm)
- 4-fold edged step-to-side-rail connection
- Handrail on both sides for safe ascending and descending
- All-round railing on three sides (height 1000 mm) including knee rail and toe board as well as safety rope for maximum fall protection
- Support part with narrow undercarriage and ballast weight for high stability
- Folds for compact storage thanks to sturdy steel hinges (when ballast weight is on the outside)
- Particularly suitable for narrow shelving aisles etc.
- Integrated Ø 125 mm fixed castors with locking device for quick transportation when folded out
- nivello® ladder shoes with patented 2-axis inclination technology
- Generous sized tool tray
- Outer width: 650 mm (without stabiliser)
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

### Scope of supply


- Ladder: 1 x
- Instructions for use and operation: 1 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS

- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

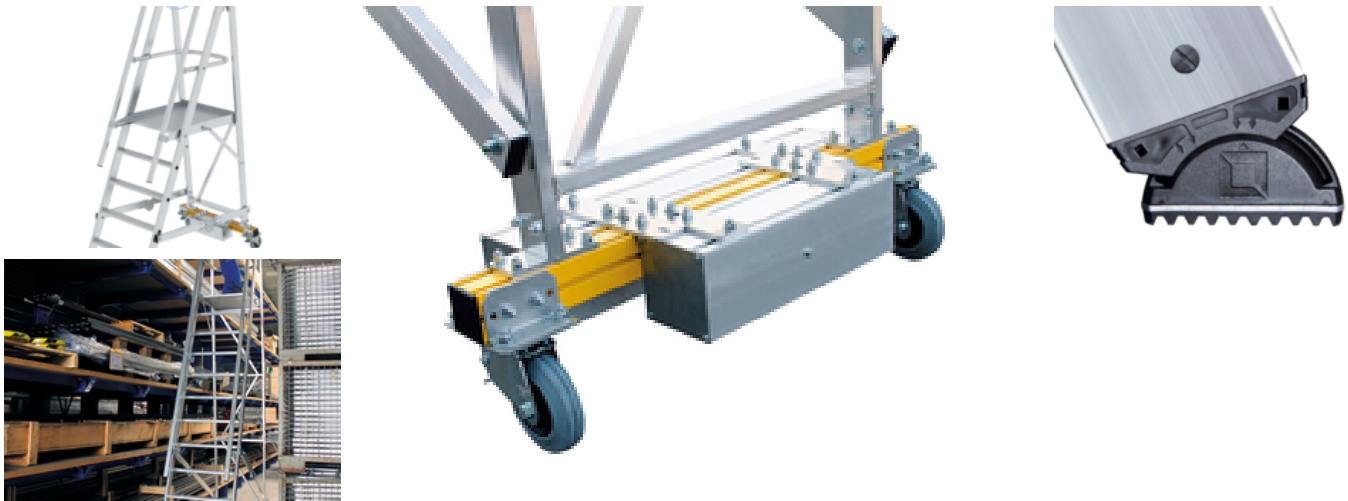

## Added value

### Safe working

- Handrails for safe ascent and descent
- Large-format, non-slip platforms
- Conical side-rail guide for safe stance
- Railings and knee boards for safe access and stance



The movable ladder shoe sets new standards in stability

[Learn more](#)



### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Castors

- Ergonomic and comfortable handling
- Simple movement from place to place



## Certificates



## Corporate certifications

Standards for quality and sustainability



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

