



Order no.: 040306

Step straight ladder without stabiliser



Number of steps

- 6
- 8
- 10
- 12
- 14
- 16
- 18

Specification

| | | | | |
|---|------------------------------|----------------------------------|--------------------------------|--|
| Working height 2.8 m | Step design Steps | Number of steps/rungs 6 steps | Step depth 80 mm | Step/Rung distance 235 mm |
| Type of non-slip protection Aluminium corrugated | Ladder length 1.65 m | Inclination 70 ° | Base area 580 mm | Outer width 420 mm |
| Depth of side-rails 73 mm | Width of side-rails 25 mm | Max. load capacity 150 kg | Design type To lean against | Transport dimensions 1645 x 425 x 103 mm, 4.5 kg |
| Business division MUNK Günzburger Steigtechnik | Order no. 040306 | | | |

Facts

- Aluminium step straight ladder
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- 4-fold edged step-to-side-rail connection
- ergo-pad® grip area
- Step spacing: 235 mm

- Ladder width: 420 mm (without stabiliser)
- Ladder inclination: 70°
- nivello® ladder shoes with patented 2-axis inclination technology
- Maximum load: 150 kg
- Note: Straight ladders over 3.0 m can be used without a stabiliser only when they are used exclusively for their intended purpose (e.g. permanently installed, fitted with hooks, fastened with a belt)


Scope of supply

- Ladder: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

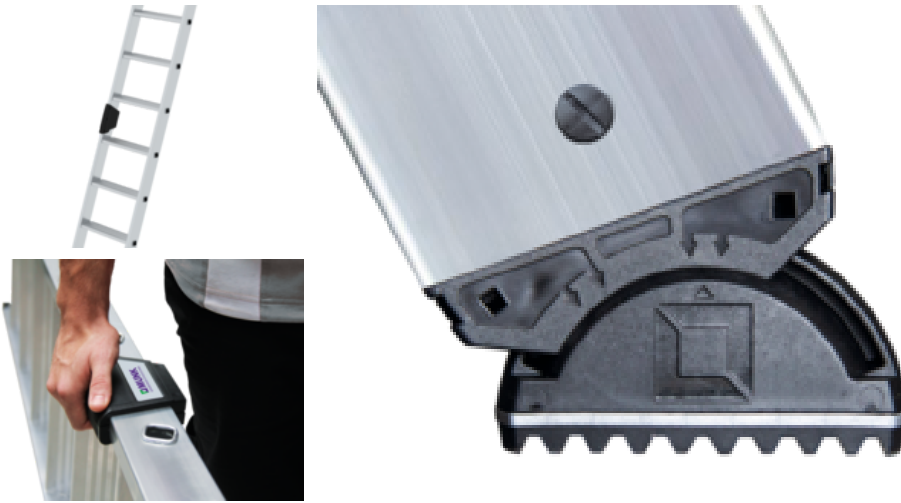

Added value

ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point



The movable ladder shoe sets new standards in stability

[Learn more](#)



Retrofit stabiliser

Safe, standards-compliant ascent

- For retrofitting existing ladders with ladder lengths over 3.0 m in compliance with standards
- Non-slip ladder shoes
- Available in different widths





Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



Certificates

25KFP0223-01 -
Test Certificate
"Bauart geprüft"

Valid in



DIN EN 131-1:2019
DIN EN 131-2:2017
DIN EN 131-3:2018
EK5/AK1 17-
1.3:2021
PAK-
ANFORDERUNG
FÜR GS (PAH
REQUIREMENT
FOR GS) AFPS GS
2019:01 PAK

Corporate certifications

Standards for quality and sustainability



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548



Nachhaltigkeit

EcoVadis
sustainable supply management

CSR-Rating in Silber 2022

