

Order no.: 041636

## Double-sided stepladder with clip-step R13



Number of steps

- 2x3
- 2x4
- 2x5
- 2x6
- 2x7
- 2x8
- 2x9
- 2x10
- 2x12
- 2x14

### Specification

Working height <b>2.2 m</b>	Step design <b>Steps</b>	Number of steps/rungs <b>2x 3 steps</b>	Step depth <b>80 mm</b>	Step/Rung distance <b>235 mm</b>
Type of non-slip protection <b>clip-step R13</b>	Height <b>670 mm</b>	Base spread <b>690 mm</b>	Inclination <b>70 °</b>	Lower outer width <b>440 mm</b>
Depth of side-rails <b>73 mm</b>	Width of side-rails <b>25 mm</b>	Max. load capacity <b>150 kg</b>	Design type <b>Freestanding   Double-sided access</b>	Weight <b>5.4 kg</b>
Transport dimensions <b>740 x 432 x 212 mm, 5.242 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Order no. <b>041636</b>	Price <b>€ 224.00</b>	

### Facts

- Stepladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- 4-fold edged step-to-side-rail connection
- clip-step R13 step padding for certified non-slip protection on all accessible steps

- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- 4-fold bolted, solid ladder joint made of aluminium
- Spreader lock with two high-strength polyester straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

### Scope of supply

- Ladder: 1 x

### Information on sustainability criteria


---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality

- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

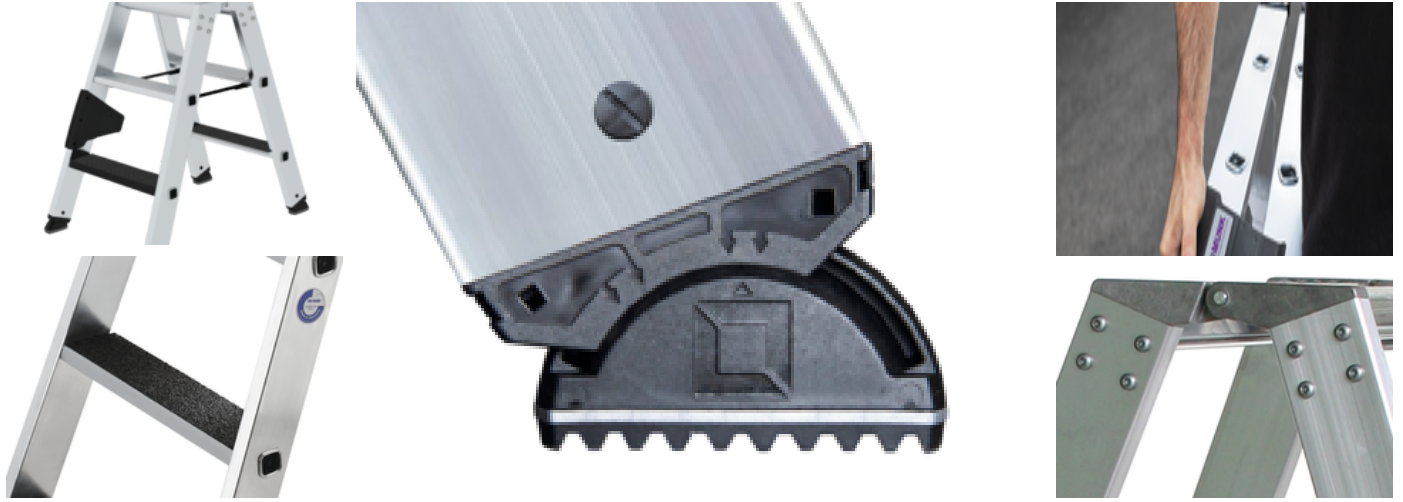

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)


- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### clip-step R 13 step padding

Certified non-slip protection for step ladders

- Fulfils the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oil-contaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



The movable ladder shoe sets new standards in stability

[Learn more](#)




### ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point




### Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



### Certificates

17KFP0690-05 -  
Test Certificate  
"Bauart geprüft"

Valid in 

DIN EN 131-1:2007  
EK5-AK1 17-  
02:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548

