



Order no.: 042703

Single-sided stepladder 250 kg with clip-step R13



Number of steps

| 3 | |
|---|--|
| 3 | |

4

5

6

7

8

Specification

| Working height 2.7 m | Step design Steps | Number of steps/rungs 3 steps | Platform included as step Yes | Step depth 80 mm |
|------------------------------|--|--|--|------------------------------|
| Step/Rung distance 235 mm | Type of non-slip protection clip-step R13 | Height 1.34 m | Platform height 670 mm | Base spread 700 mm |
| Inclination 70 ° | Lower outer width 470 mm | Depth of side-rails 73 mm | Depth of side-rails, support 58 mm | Width of side-rails 25 mm |
| Max. load capacity 250 kg | Design type Freestanding Single-sided access | Transport dimensions 1430 x 463 x 165 mm, 6 kg | Business division MUNK Günzburger Steigtechnik | Order no. 042703 |

Facts

- Stepladder made of aluminium
- 80 mm deep steps and large platform
- Stable rectangular tube side-rails
- 'safe-cap' ladder joint
- clip-step R13 step padding for certified non-slip protection



- 4-fold edged step-to-side-rail connection
- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- Practical storage tray with integrated hooks and tool holders
- From five steps or more: Spreader lock with two high-strength polyester straps

Step spacing: 235 mm
Ladder inclination: 70°
Maximum load: 250 kg

Scope of supply

Ladder: 1 x

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090


Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality



- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

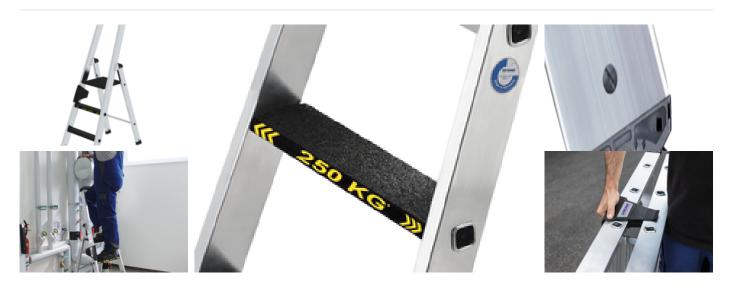



Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Ladder joint safe-cap

- Smooth ladder joint with large contact surface and sturdy plastic protective cap
- The 6 rivets and thicker wall thickness provide for greater stability and protection at this sensitive point on the ladder, increasing its service life
- The safe-cap protects the ladder when in use, when loading and storing, as well as the contact surfaces, walls, truck loading areas and the joint itself



Storage tray

- For the practical storage of small parts
- Made from high-quality plastic
- Partly with integrated hooks and tool holders
- Different versions, depending on the ladder model



The movable ladder shoe sets new standards in stability





clip-step R 13 step padding

Certified non-slip protection for step ladders

- Fulfils the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oilcontaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on <u>TRBS 2121 Part 2</u> has been summarised on our Service page
- Read our <u>tips and tricks</u> on how to calculate <u>working height</u>




ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point





Certificates

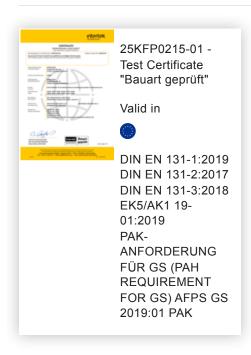



Corporate certifications

Standards for quality and sustainability









