



Order no.: 115006

Hook ladder DIN EN 1147

Specification

Intended use	Ladder length	Clear width between rungs 250 mm	Outer width	Ladder feet
Access	4.4 m		300 mm	Ladder shoe
Depth of side-rails	Width of side-rails	Step/Rung height	Step depth	Number of steps/rungs
60 mm	25 mm	28 mm	29 mm	10 rungs
Step/Rung distance	Max. load capacity	Persons max.	Material	Rung covering
335 mm	150 kg	1	Aluminium	Standard (red)
Transport dimensions 4400 x 300 x 120 mm, 11 kg	Business division MUNK Rettungstechnik	Order no. 115006		

Facts

- Hook ladder made of aluminium
- Access ladder compliant with DIN EN 1147
- With heat-insulating, non-slip plastic coating
- Folding hook made of galvanised steel secured with locking pin
- Rubber feet as spacers



- 10 climbing rungs welded with side-rails, 3 hook rungs and 1 deck rung
- Corrosion-resistant fixtures made of galvanised steel
- Non-slip and replaceable ladder shoes
- Permissible load: 108 kg / 1 person

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090

Corporate certification: EcoVadis


- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users



More product pictures



Certificates

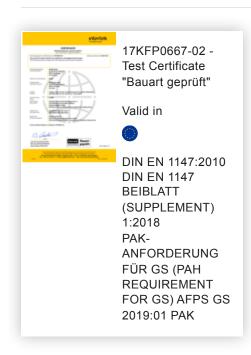



Corporate certifications

on sustainability criteria







