



Order no.: 011609

# Rung push-up extension ladder with standard stabiliser



Number of rungs

2x9 2x11	2x13	2x15	2x17
----------	------	------	------

# **Specification**

Working height <b>5.7 m</b>	Step design <b>Rungs</b>	Number of steps/rungs 2x 9 rungs	Step/Rung height 30 mm	Step depth 30 mm
Step/Rung distance 280 mm	Retracted length 2.8 m	Extended length 4.6 m	Outer width <b>420 mm</b>	Stabiliser width <b>930 mm</b>
Depth of side-rails <b>73 mm</b>	Width of side-rails <b>25 mm</b>	Design type To lean against   2- part	Weight 12.5 kg	Transport dimensions 2750 x 425 x 150 mm, 12.5 kg
Business division MUNK Günzburger Steigtechnik	Order no. <b>011609</b>	Price <b>€ 316.00</b>		

# **Facts**

- Rung push-up extension ladder made of aluminium
- Stable rectangular tube side-rails
- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection



- Simple height adjustment from rung to rung thanks to insertion hook with automatically engaging lift-off protection
- Upper ladder from size 2x14 rungs with wall castors
- Corrosion-resistant guide fixtures
- Upper ladders up to 3.0 m with nivello<sup>®</sup> ladder shoes
- Rung distance: 280 mm
- Ladder width: 420 mm (without stabiliser)
- Maximum load: 150 kg
- Standard stabiliser with non-slip ladder shoes with optimum width for the selected product. Ensures maximum stability and safe ascent for straight ladders over 3.0 m. The stabiliser is enclosed separately and is screwed to the lower end of the rail in two places
- Note: In accordance with standards, the attached push-up extension ladder section cannot be separated from the ladder with lengths over 3.0 m

#### Scope of supply

Ladder: 1 x

Stabiliser (enclosed separately): 1 x

Instructions for use and operation: 1 x

### Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size



- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

# More product pictures





#### Added value

#### **Industrial grade**

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



#### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



Optimum and smooth operation, thanks to easily accessible elements

- Simple height adjustment from rung to rung or from step to step
- Wall wheels on the upper part (from 14 rungs or more)
- Fittings with sliding guides
- Smooth-running rope pulley



#### Standard stabiliser

Safe, standards-compliant ascent for straight ladders over 3.0 m

- Different stabiliser widths, suitable for the selected ladder length
- Non-slip ladder shoes
- Individually available as spare part






#### roll-bar retrofit kit

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down



## **Certificates**

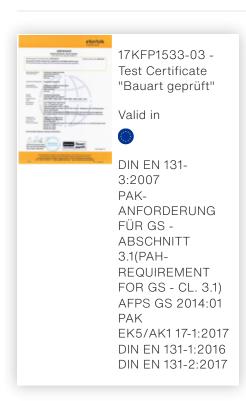



# **Corporate certifications**

on sustainability criteria









